



IMMERSION COILS

Slimline Coil™ Model D 500 & QD 500 Heat Exchangers

Niche Slimline Coil™ Fluoropolymer Heat Exchangers are widely used in the metal finishing and chemical processing industries, and are especially suited to batch and continuous steel pickling applications. The inherent non-stick characteristics of fluoropolymer resins resist corrosion and fouling, extend heat exchanger service life, and improve value-in-use through savings in plant maintenance costs.

Niche Q-Series Slimline Coil™ Heat Exchangers are constructed from a proprietary resin compound that improves durability, and pressure and temperature capabilities over conventional coils—high performance that enables Niche Q-Series Slimline Coils to handle many steam heating applications without desuperheating. In metal processing, high efficiency Niche Slimline Coil Heat Exchangers also save energy, reduce waste, and cut processing costs by minimizing acid consumption and spent pickle liquor disposal.


Niche Slimline Coil Heat Exchangers are available in Q-Series as well as FEP, in U-shape as well as straight configurations ranging in lengths from 4 to 16 feet (1.2 to 4.9 m). Contact a Niche representative for chemical resistance data on your application.



Model Information

Example: QDC500SM8-10-2		
Q	RESIN TYPE	(blank) = FEP
		Q = PFA/Graphite
D	SLIMLINE COIL	
C	SUPPORT RODS (TEFLON® COATED)	(blank) = Carbon Steel
		C = Stainless Steel
500	MODEL NUMBER	
SM	END CONNECTIONS	S = Stainless Steel
		T = TEFLON® Type
		SM = SS/Metric
8	GENERATION	
10	NOMINAL LENGTH (FT.)	
2	COIL CONFIGURATION	0-12 = H dimension (0-12 ft)
		SS = Straight coil, side-mounted
		SB = Straight coil, bottom-mounted
		U = Tight “U”

Operation Limits

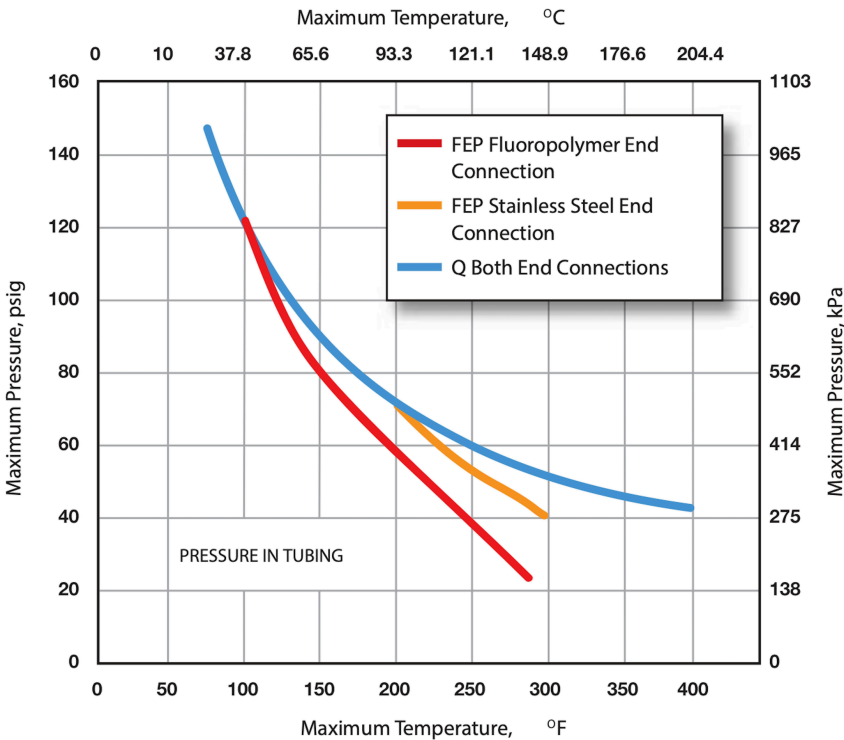


Specifications

Description	Spec
Heat Transfer Area	49 to 245 ft ² (4.6 to 22.8 m ²)
Tube Outside Diameter	.125 inch (3.175 mm)
Tube Wall Thickness	.0125 inch (.3175 mm)
Average Heat Transfer Coefficient Q	60-100 BTU/Hr.-ft.2-°F (293-488 Kcal/Hr.-m2-°C)
Average Heat Transfer Coefficient FEP, PFA	30-50 BTU/Hr.-ft.2-°F (146-244 Kcal/Hr.-m2-°C)


Heat Transfer Area

LENGTH ft	AREA	
	ft ²	m ²
4	49.1	4.6
6	81.8	7.6
8	114.5	10.6
10	147.2	13.7
12	179.9	16.7
14	212.0	19.8
16	245.3	22.8

Extended Slimline Coil - GENERATION 8 (S END)

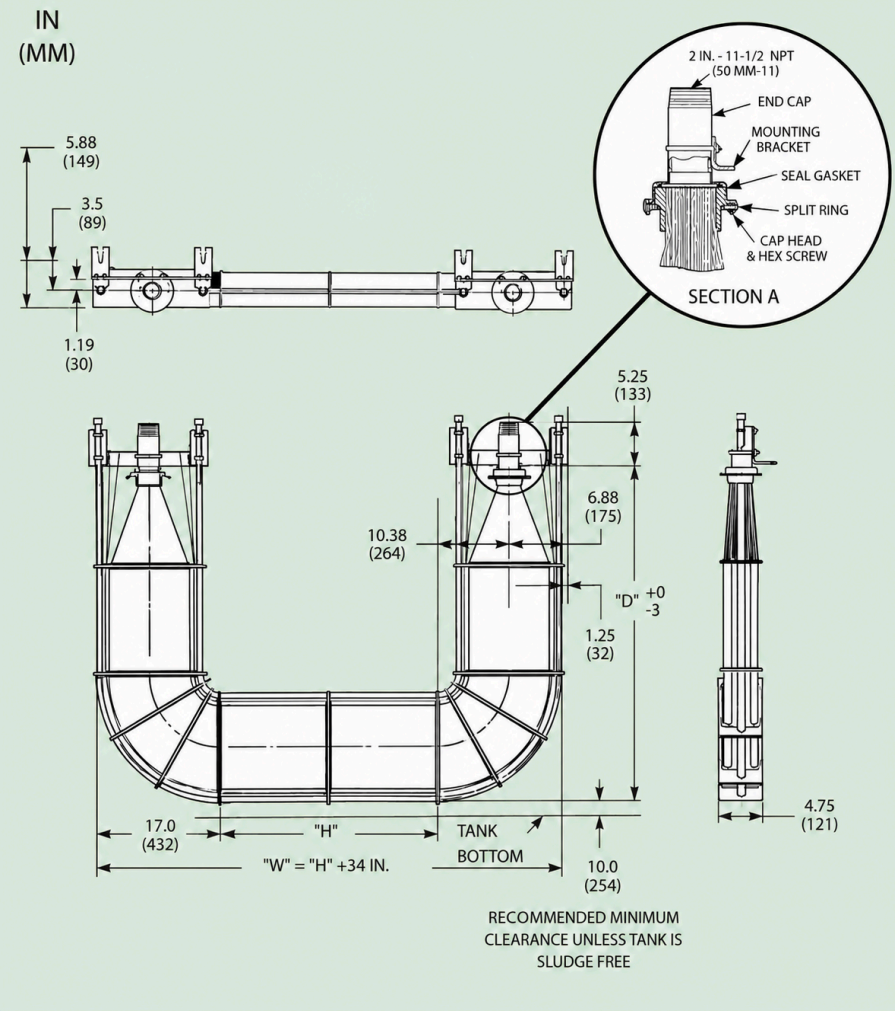


Extended Slimline Coil - GENERATION 8 (T END)

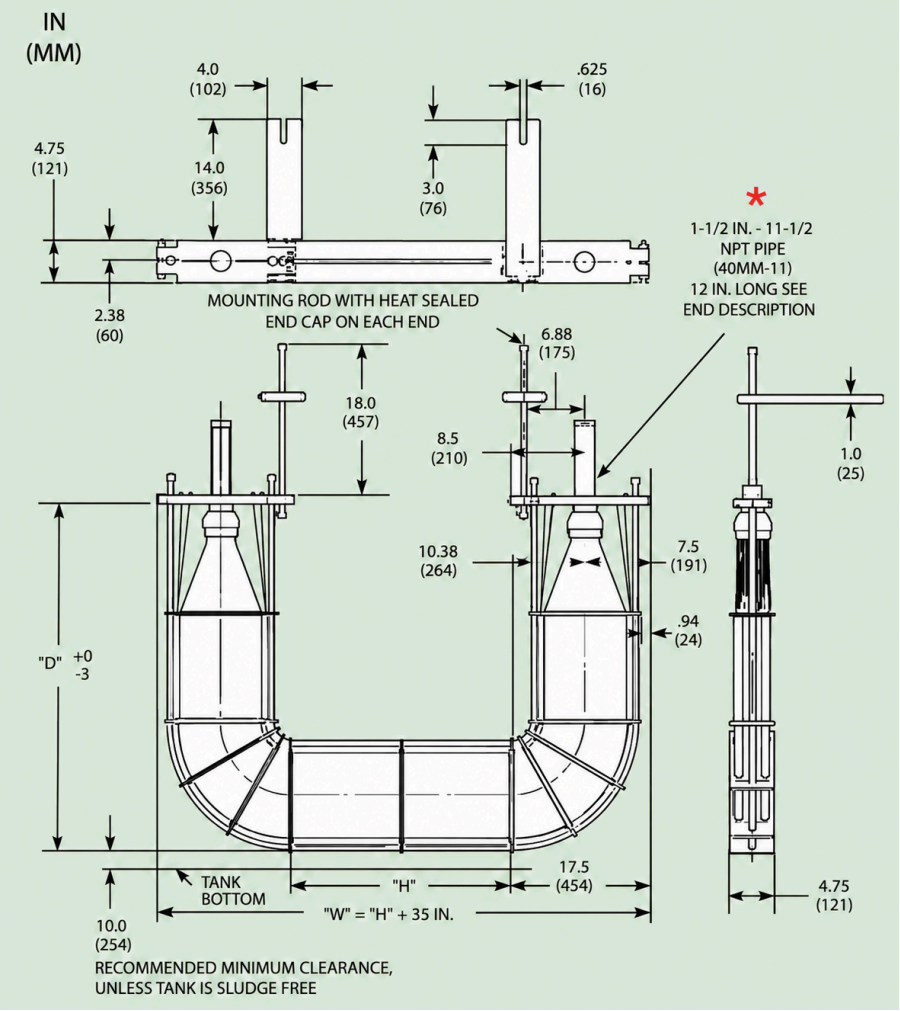


Extended Slimline Coils

NOM. LENGTH ft	H DIMENSION												
	0	1	2	3	4	5	6	7	8	9	10	11	12
	D DIMENSION, +0 IN -3 IN												
5	3 ft 2.25 in	2 ft 8.25 in											
6	3 ft 5.25 in	2 ft 11.25 in	2 ft 5.25 in										
7	3 ft 11.25 in	3 ft 5.25 in	2 ft 11.25 in	2 ft 5.25 in									
8	4 ft 5.25 in	3 ft 11.25 in	3 ft 5.25 in	2 ft 11.25 in	2 ft 5.25 in								
10	5 ft 5.25 in	4 ft 11.25 in	4 ft 5.25 in	3 ft 11.25 in	3 ft 5.25 in	2 ft 11.25 in	2 ft 5.25 in						
12	6 ft 5.25 in	5 ft 11.25 in	5 ft 5.25 in	4 ft 11.25 in	4 ft 5.25 in	3 ft 11.25 in	3 ft 5.25 in	2 ft 11.25 in	2 ft 5.25 in				
14	7 ft 5.25 in	6 ft 11.25 in	6 ft 5.25 in	5 ft 11.25 in	5 ft 5.25 in	4 ft 11.25 in	4 ft 5.25 in	3 ft 11.25 in	3 ft 5.25 in	2 ft 11.25 in	2 ft 5.25 in		
16	8 ft 5.25 in	7 ft 11.25 in	7 ft 5.25 in	6 ft 11.25 in	6 ft 5.25 in	5 ft 11.25 in	5 ft 5.25 in	4 ft 11.25 in	4 ft 5.25 in	3 ft 11.25 in	3 ft 5.25 in	2 ft 11.25 in	2 ft 5.25 in

Tight "U" Slimline Coil - Generation 8 (S end)

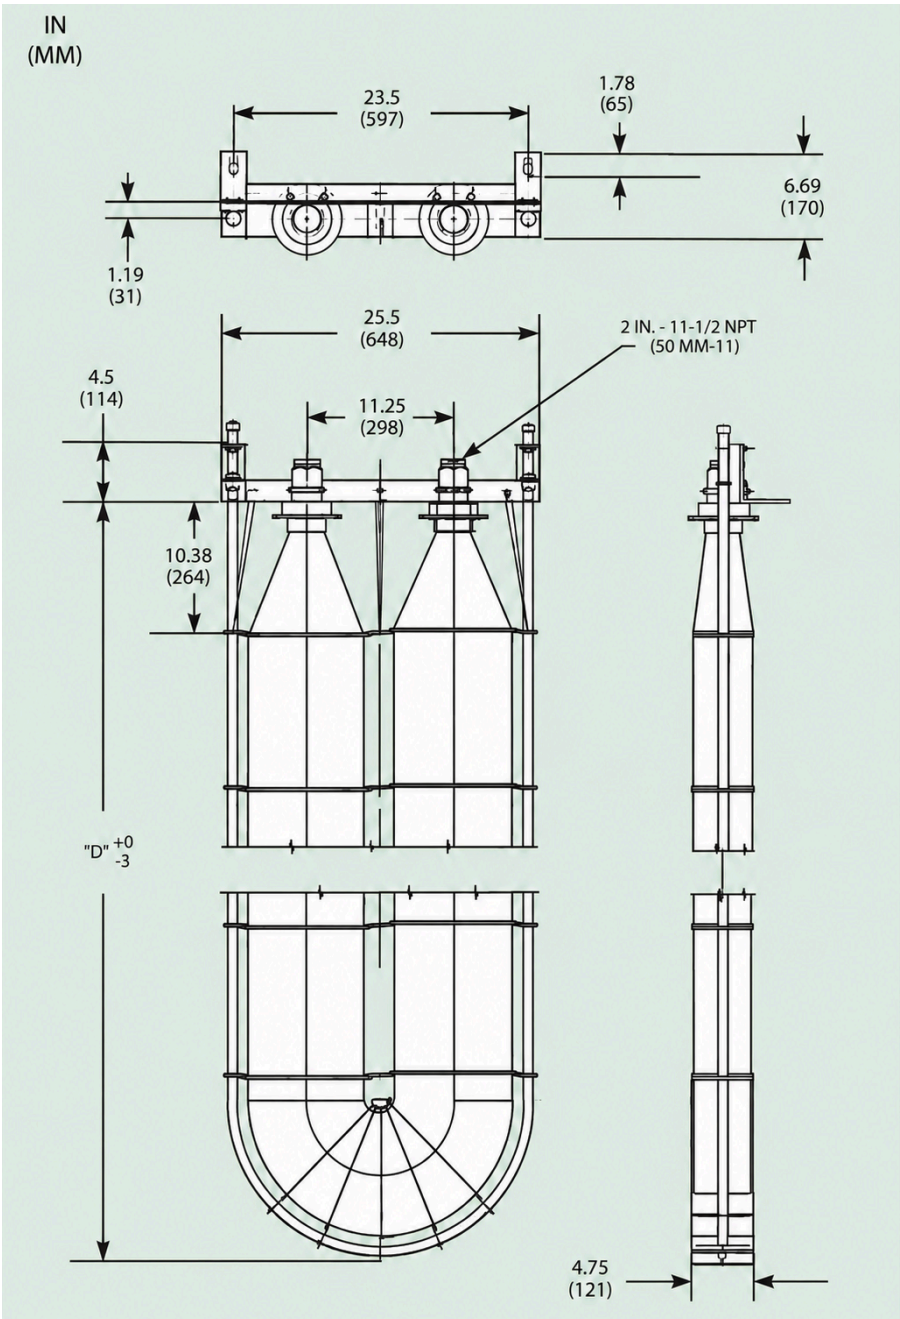

Tight "U" Slimline Coil - Generation 8 (T end)

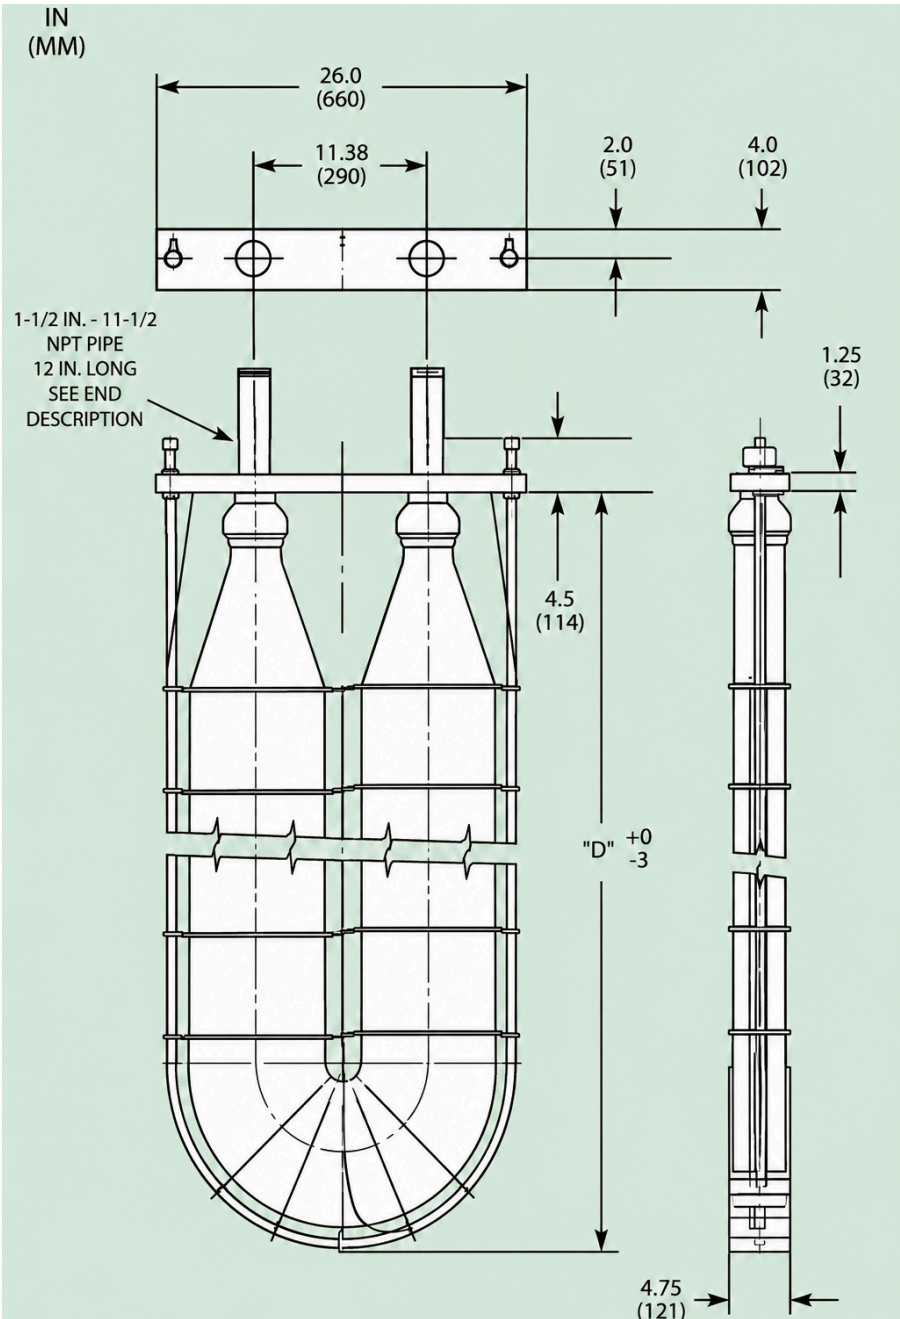


Tight "U" Slimline Coil - Generation 8 (S end)

LENGTH, ft	D DIMENSION
5	3 ft 0.5 in
6	3 ft 6.5 in
7	4 ft 0.5 in
8	4 ft 6.5 in
10	5 ft 6.5 in
12	6 ft 6.5 in
14	7 ft 6.5 in
16	8 ft 6.5 in


Tight "U" Slimline Coil - Generation 8 (T end)

LENGTH, ft	D DIMENSION
5	3 ft 1.75 in
6	3 ft 7.75 in
7	4 ft 1.75 in
8	4 ft 7.75 in
10	5 ft 7.75 in
12	6 ft 7.75 in
14	7 ft 7.75 in
16	8 ft 7.75 in

Straight Slimline Coil - **Generation 8 SB**

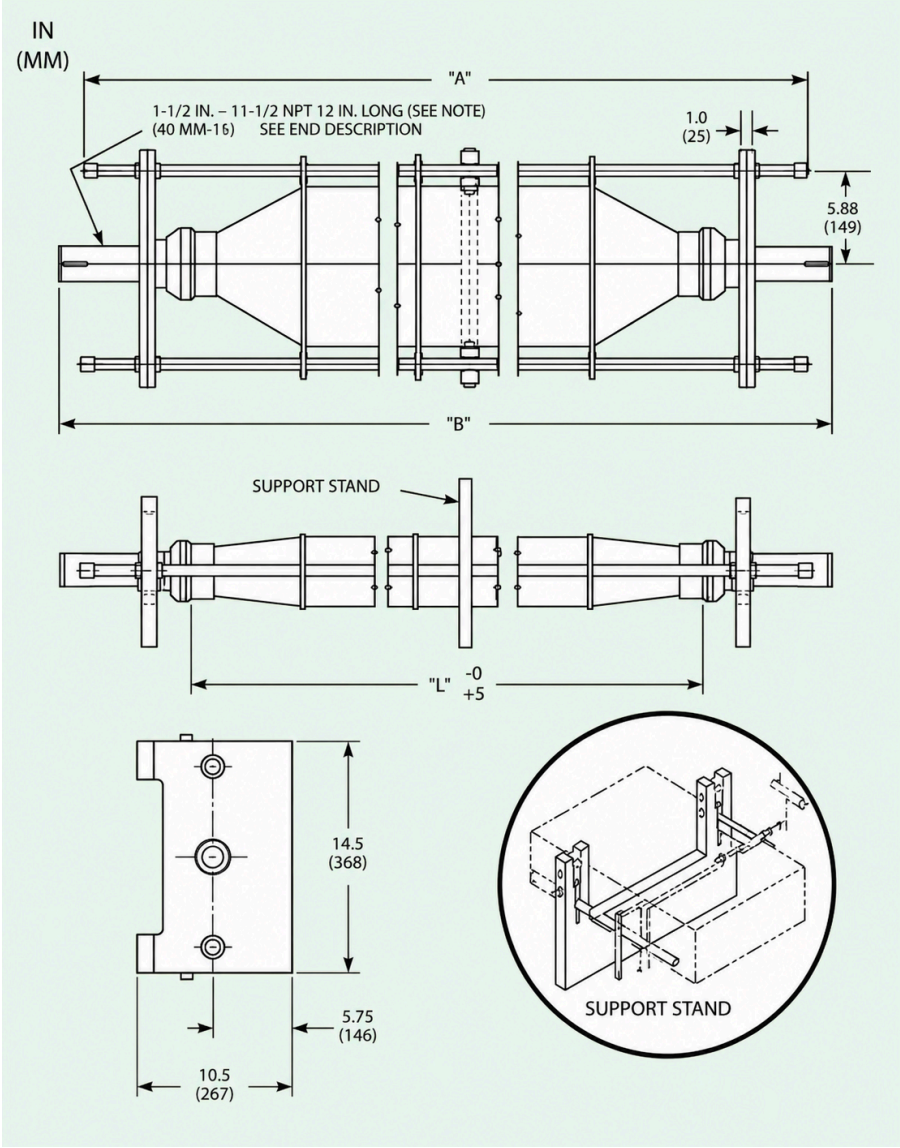

Straight Slimline Coil - **Generation 8 SS**

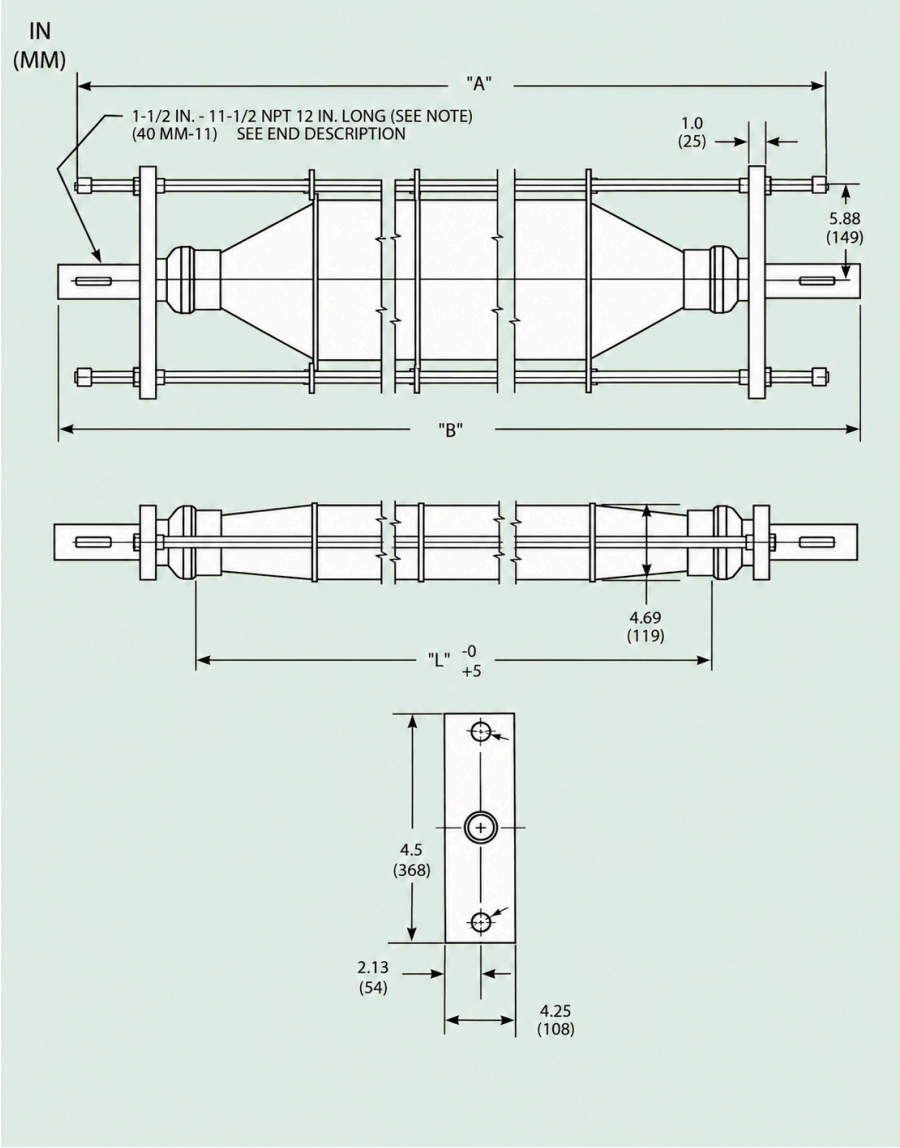

Straight Slimline Coils

LENGTH ft	QD500-T-8-NL-SB & SS			No. of Support Stands Required
	A	B	L	
4	5 ft 8.25 in	6 ft 11.0 in	4 ft 5.0 in	0
5	6 ft 8.25 in	7 ft 11.0 in	5 ft 5.0 in	0
6	7 ft 8.5 in	8 ft 11.0 in	6 ft 5.0 in	0
7	8 ft 8.25 in	9 ft 11.0 in	7 ft 5.0 in	1
8	9 ft 8.25 in	10 ft 11.0 in	8 ft 5.0 in	1
10	11 ft 8.25 in	12 ft 11.0 in	10 ft 5.0 in	1
12	13 ft 8.25 in	14 ft 11.0 in	12 ft 5.0 in	2
14	15 ft 8.25 in	16 ft 11.0 in	14 ft 5.0 in	2
16	17 ft 8.25 in	18 ft 11.0 in	16 ft 5.0 in	2



42 Mountain Avenue
Nesquehoning, Pennsylvania, 18240-2201 USA
Tel: +1 570-645-6917 - 800-441-7777 (US and Canada Only)
Fax: +1 570-645-6950
www.nichefpp.com
info@nichefpp.com
© 2023 Niche Fluoropolymer Products. All rights reserved.
1M1117P (040022)

Fluoropolymer resins are generally considered inert to most chemicals. Under certain conditions of pressure and temperature, or combinations of chemicals, fluoropolymer tubing should not be used. Please contact Niche for discussion of your specific process to be certain that our products are appropriate for your intended use.

Adequate ventilation should be used where fluoropolymers are heated during tube repairs. Flu-like symptoms occur from exposure to vapors evolved from fluoropolymers at very high temperatures, up to 800°F or from smoking materials that contain particles of fluoropolymers. Symptoms pass within 48 hours and are only adverse effects observed in humans to date. Unheated fluoropolymers are essentially inert and are non-irritating to the skin.

This information set forth herein is furnished free of charge and is based on technical data which Niche believes to be reliable. It is intended for use by persons having technical skills and at their own discretion and risk. Since conditions of use are outside our control, we make no warranties, express or implied, and assume no liability in connection with your use of this information. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.